REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	RELEASED TO PRODUCTION	04/16/2025	REP

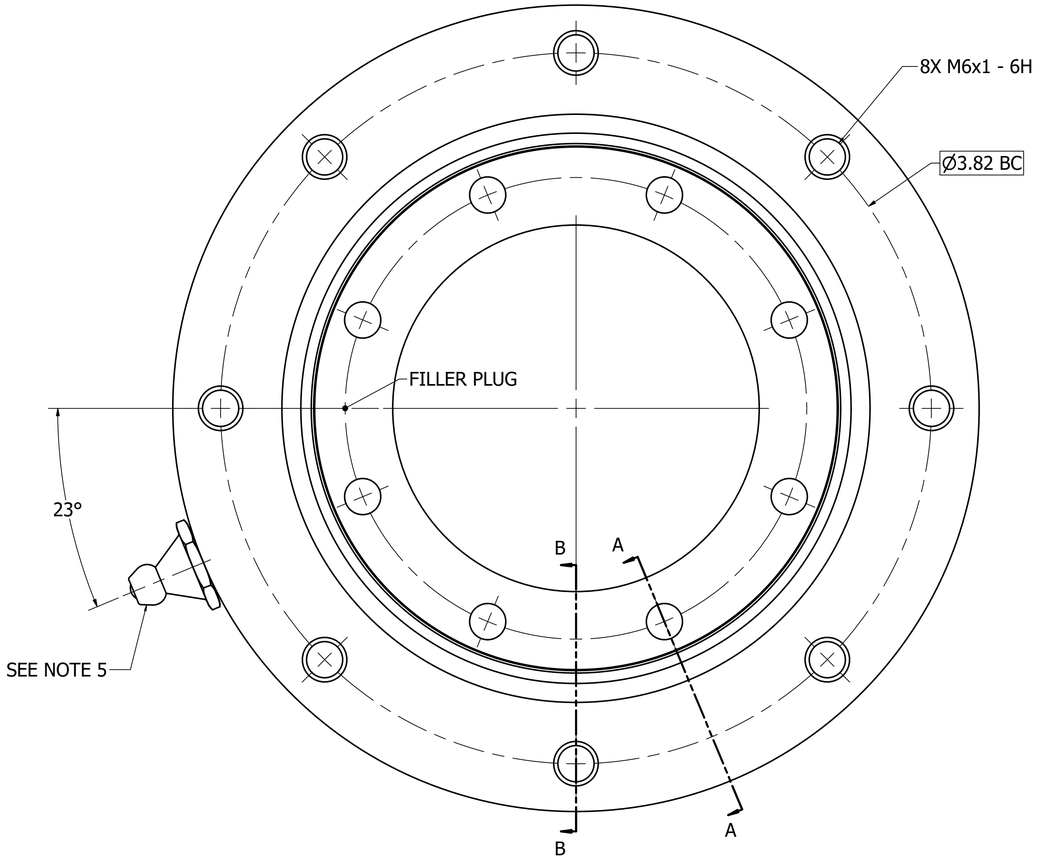

30P.0080.06.000
MATERIAL: STEEL, 42CrMo

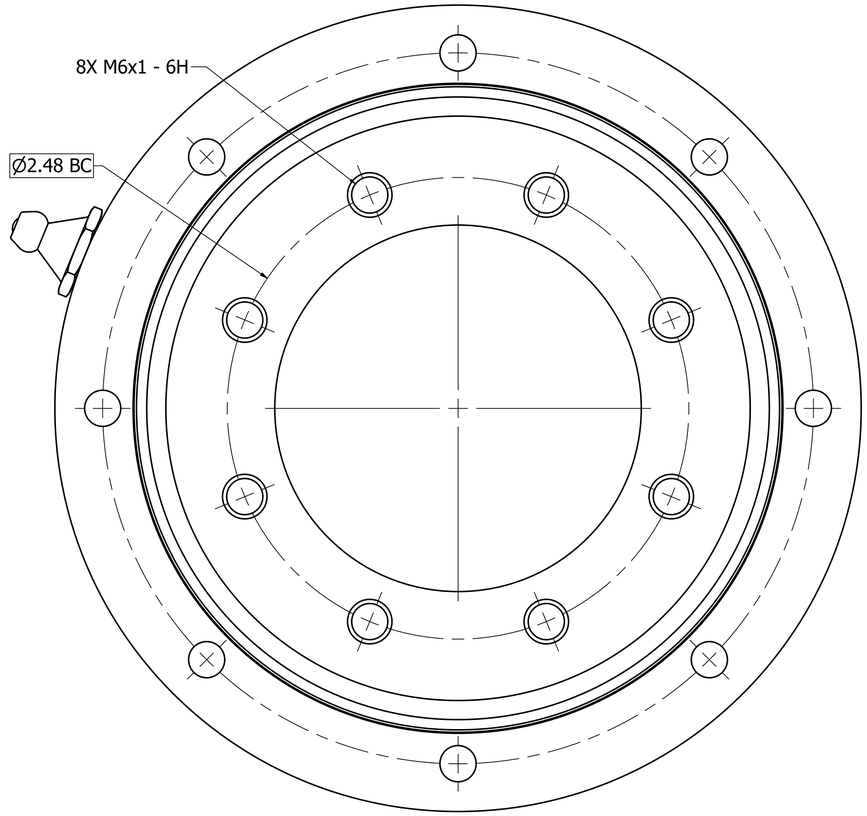

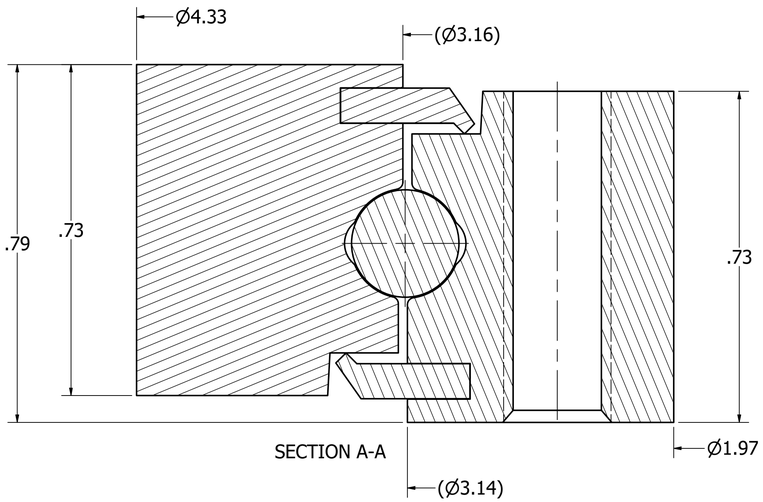

SECTION A-A

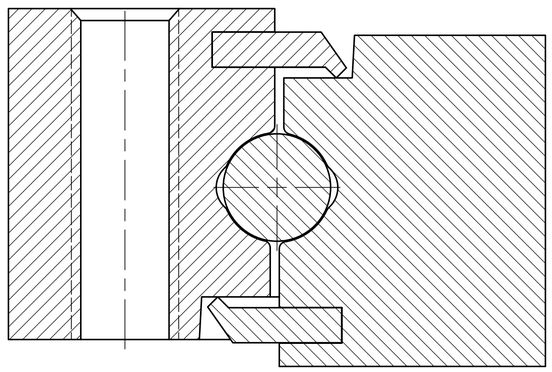

SECTION B-B

STANDARD NOTES:

1. BREAK ALL SHARP CORNERS AND EDGES.

2. RACEWAY INDUCTION HARDENING CASE DEPTH TO BE NO LESS THAN .118 INCHES AT HRC 55-62.

3. GREASE TO BE STANDARD EP2.

4. SOFT SPOT TO BE MARKED WITH AN "S" ON INNER AND OUTER RING NON-MOUNTING SURFACE INDICATING RACEWAY HARDNESS GAP.

5. CENTERLINE OF GREASE FITTING, 1X EQUALLY SPACED, 1/8-27 NPT FITTINGS, PROTRUSION FROM OD (OUTER RING) NOT TO BE GREATER THAN .75.

6. PERMANENTLY MARK INFO, .06 MIN FONT HEIGHT.

   MARKING TO INCLUDE:
   PART NUMBER
   SERIES NUMBER IN LOT
   DAY-MONTH-YEAR

   EXAMPLE:
   30P.0080.06.000
   001 (002, 003, ETC)
   25-11-2014

7. WEIGHT: 2 lbmass

INFORMATION CONTAINED HEREIN CONSTITUTES PROPRIETARY CONFIDENTIAL INFORMATION OF POTESTA & COMPANY LLC. AND IS TO BE ACCEPTED ONLY SUBJECT TO THAT UNDERSTANDING. IT IS TO BE KEPT CONFIDENTIAL AND NOT TO BE COPIED, USED, OR CONVEYED TO OTHERS WITHOUT POTESTA & COMPANY'S WRITTEN AUTHORIZATION.

DRAWN GVS	4/16/2025	ALL DIMENSIONS: in.
CHECKED		SLEWPRO 1239 Hudson Gate Dr. Hudson, OH 44236 PH: 330.633.7735 www.SlewPro.com
QA		
MFG		TITLE: BEARING ASSY, PLAIN, FOUR POINT, SINGLE ROW BALL
APPROVED		
SIZE D	SHEET 1 OF 1	SCALE NOT TO SCALE — PART NO. 30P.0080.06.000