REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
1	RELEASED TO PRODUCTION	2/13/23	REP

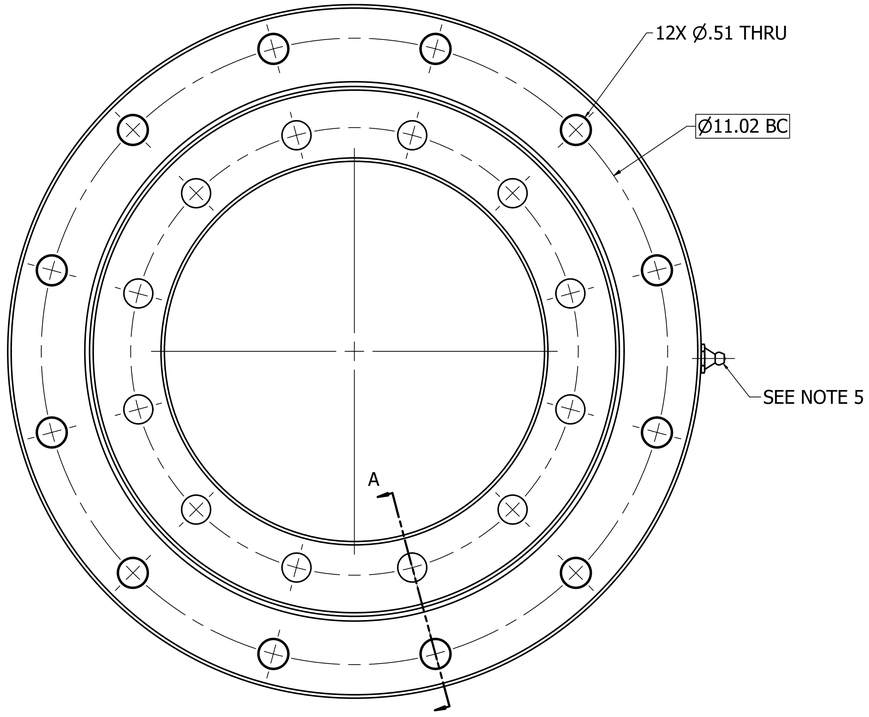

30P.0196.13.000
MAT'L: STEEL, 42CrMo

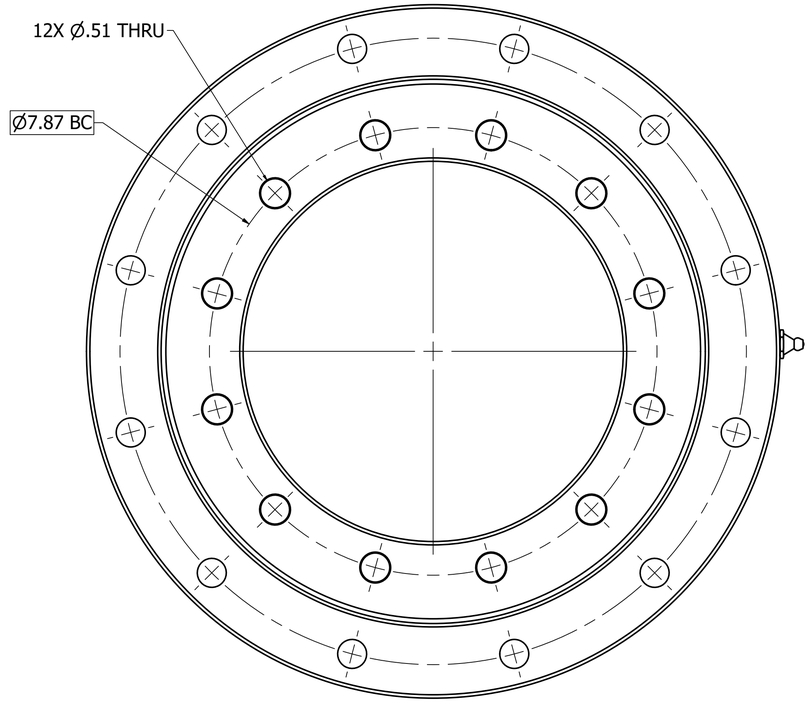

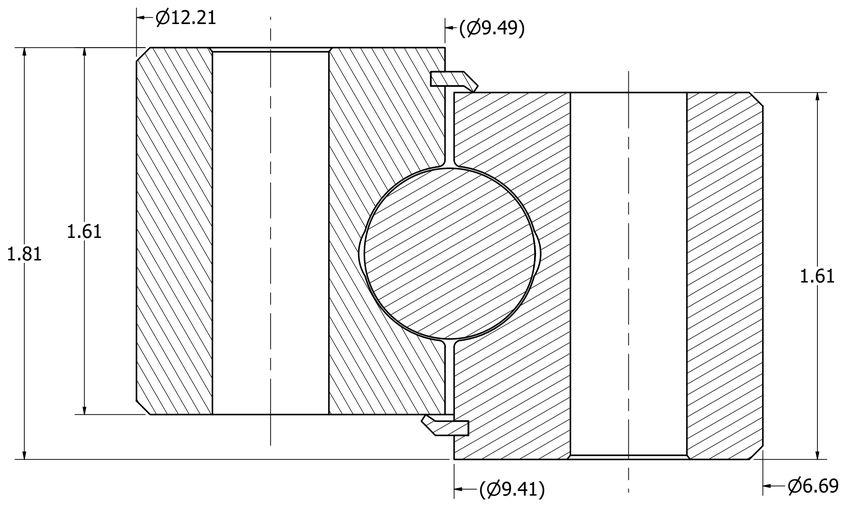

SECTION A-A

STANDARD NOTES:

1. BREAK ALL SHARP CORNERS AND EDGES.
2. RACEWAY INDUCTION HARDENING CASE DEPTH TO BE NO LESS THAN .079 INCHES AT HRC 55-60.
3. GREASE TO BE STANDARD EP2.
4. SOFT SPOT TO BE MARKED WITH "S".
5. CENTERLINE OF GREASE FITTINGS, 1X EQ SP, 1/8-27 NPT, FITTING PROTRUSION FROM OD (OUTER RING) NOT TO EXCEED .75.
6. STAMP "G" ON TOP OF OUTER RACE INDICATING RACEWAY HARDNESS GAP.
7. PERMANENTLY MARK INFO, .06 MIN FONT HEIGHT.

   MARKING TO INCLUDE:
   PART NUMBER
   SERIES NUMBER IN LOT
   DAY-MONTH-YEAR

   EXAMPLE:
   30P.0196.13.000
   001 (002, 003, ETC)
   25-11-2014

8. WEIGHT: 33 lbmass

INFORMATION CONTAINED HEREIN CONSTITUTES PROPRIETARY CONFIDENTIAL INFORMATION OF POTESTA & COMPANY LLC. AND IS TO BE ACCEPTED ONLY SUBJECT TO THAT UNDERSTANDING. IT IS TO BE KEPT CONFIDENTIAL AND NOT TO BE COPIED, USED, OR CONVEYED TO OTHERS WITHOUT POTESTA & COMPANY'S WRITTEN AUTHORIZATION.

DRAWN	Cole Harvey	4/26/2024	ALL DIMENSIONS: in.
CHECKED			SLEWPRO 1239 Hudson Gate Dr. Hudson, OH 44236 PH: 330.633.7735 www.SlewPro.com
QA			
MFG			TITLE: BEARING ASSY, PLAIN, FOUR POINT, SINGLE ROW BALL
APPROVED			PART NO.: 30P.0240.19.000
SIZE D	SHEET 1 OF 1	SCALE NOT TO SCALE	